




## Shower-Ware® 500 Series

Zenith Built-In Showers

**MaxSupply**

Address: PO Box 4668 #76520 New York, NY 10163-4668  
Phone: 1-800-483-0823

Fax: 1-888-828-6021  
Website: [www.MaxSupply.com](http://www.MaxSupply.com)  
Email: [sales@maxsupply.com](mailto:sales@maxsupply.com)

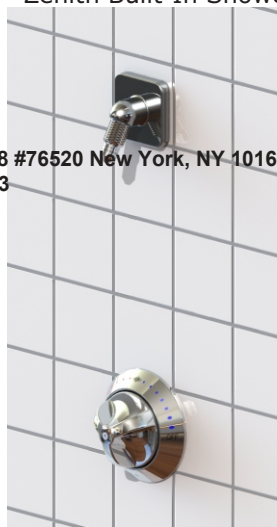

518

Fixture May Show Some Available Options

Please visit [www.maxsupply.com](http://www.maxsupply.com) for most current specifications.

### Zenith Built-In Showers

**Shower** consists of a control valve and a shower head. They are particularly suited for individual applications such as coach showers. Zenith valve and shower head combinations feature the utmost in service desirability.

**Riser** piping between valve and shower head is furnished by others. Valve supply inlets and shower head include 1/2" NCT socket connections. Air-Control valves and shower head combinations include push-in type tubing connections for PE (polyethylene) riser tubing provided and 1/2" NPS hose end supply connections.

**Control Valve** body is heavy cast bronze and all wearing parts are contained in a replaceable cartridge. Exposed surfaces are either polished stainless steel or triple chrome-plated. All exposed fasteners are tamper-resistant.

**Shower Head** is an Acorn Logan Wizard Shower Head with square mounting flange and is regularly furnished front drilled with stainless steel tamper-resistant screws. Connection to the water supply is made via an exclusive O-ring adapter, for back inlet shower heads.

#### GUIDE SPECIFICATION

Provide and install Acorn Zenith Built-In Showers (specify model number and options). Valve body and shower head shall be solid brass with all exposed parts triple chrome-plated or polished stainless steel. Shower shall be provided with the following optional equipment: (example -F Flow Control, -G Individual Stops).



# Shower-Ware®: 500 Zenith Built-In Showers

## MODEL NUMBER AND OPTIONS SELECTION

### SERIES (Must Specify)

5 Zenith

### SUPPLY (Must Specify)

-1 Back Supply (-1, -5 & -7 valves)  
 -3 Top or Bottom Supply

### VALVE (Must Specify)

-0 Electronic Valves, Single Temp Metering  
 -1 Flo-Cloz, H & C  
 -5 Flo-Cloz, Single Temperature  
 -6 Air-Control, Single Temperature Metering  
 -7 Meter-Matic, Single Temperature Metering  
 -8 T/P Temperature-Pressure Balancing Mixing Valve With Patented Ligature Resistant Tri-Lever Handle (ASSE 1016 Compliant)  
 -9 Without Valves (Valves by Others) "Shower Head Only"

### ELECTRONIC VALVE SELECTION

#### (Refer to Valves Section for Submittal Data)

-EVS1 Electronic Valve System - Single Temp  
 -EVSP1 Electronic Valve Sys. w/ Piezo Pushbutton  
 -MVC1 Time-Trol - Single Temp  
 -CI Cycle Interrupt  
 -PPZ1 Programmable Piezo Pushbutton (Single Temperature Only)


### PRODUCT OPTIONS (Must Specify)

-A Anchor Plate  
 -B Back Plate, Wall Thickness \_\_\_\_\_  
 Wall Type \_\_\_\_\_  
 -BA Bent Arm Head  
 -BAT Battery Operated (-MVC1)

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### PRODUCT OPTIONS (cont.)

-CSH Conical Shower Head (Ligature Resistant)  
 -D Soap Dish  
 -DIV-FX Diverter Valve with Hand Shower & 60" Stainless Steel Hose  
 -QD Quick-Disconnect  
 -PSO -QD w/ Positive Shut-Off  
 -DIV-FH Diverter Valve with additional Fixed Head (Shower options specified apply to both shower heads.)  
 -F Flow Control, Specify: (Showerhead Only)  
 1.4 GPM  1.6 GPM  2.0 GPM  
 -FX Hand Shower With 60" Stainless Steel Hose (In Lieu of Conventional Showerhead)  
 -QD Quick-Disconnect  
 -PSO -QD w/ Positive Shut-Off  
 -G Individual Stops (Flo-Cloz Only)  
 -GX Individual Checkstops (Flo-Cloz Only)  
 -H Hand Volume Control  
 -HL Hi-Lo Mounting Brackets (For Hand Shower)  
 -K Allen Key Volume Control  
 -LVR Lever Handle (-5 & -8 Valve Only)  
 -MS Modular Privacy Compartments (See Diana Privacy Tab)  
 -MSH Multi-Stream Shower Head  
 -MV Metering Valve in Riser (Air-Control)  
 -P Penal Shower Head  
 -PBH Hemispherical Pushbutton  
 -RD Recessed Soap Dish  
 -SB 24" Slide Bar (For -FX Hand Shower)  
 -TF Transformer  
 -WS Without Shower Head  
 -Y Universal Ball Joint  
 -YY Lockable Universal Ball Joint  
 -Z Up-Down Ball Joint  
 -ZZ Lockable Up-Down Ball Joint

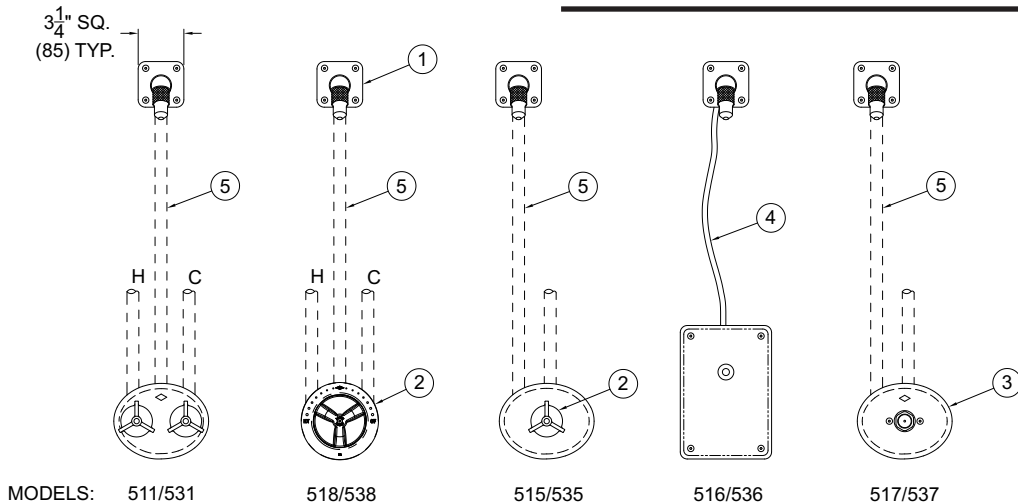

#### Notes:

1. Flanged Showerhead.
2. Valve Control Handle.
3. Valve Escutcheon.
4. 3/8" Low Density PE Tubing.
5. 1/2" NCT Riser By Others.

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>