

Location:



P6012


1 1/2" Wide, Stainless Steel Body and Grate System

SPECIFICATION:

MIFAB® Series P6012, 1 1/2" wide, 16 gauge fabricated Type 304 stainless steel presloped trench drain (1/8" per foot) with slotted Load Class "A" Light duty stainless steel ADA compliant grates. Free area of 2.0 square inches per 1' section. Square bottom bodies have flanged ends to connect to each other with a neoprene rubber gasket in between. Bottom and end outlets are available in 1 1/2" or 2" no hub outlet connections (Specify outlet size) and fabricated as part of the trench drain system. Also available with B, C, D and E load rated stainless steel grates and optional anchor flange (Suffix -FL).

FUNCTION:

Used in front of walk in coolers, barrier free showers and industrial, commercial, kitchen and other hygienic and/or corrosive areas. Type 304 stainless steel construction provides for ease of cleaning, maintenance and sanitary installation. The inside of the body is manufactured without any overlapping material to ensure that bacteria does not have a place to grow. All grate openings are polished to a smooth finish.

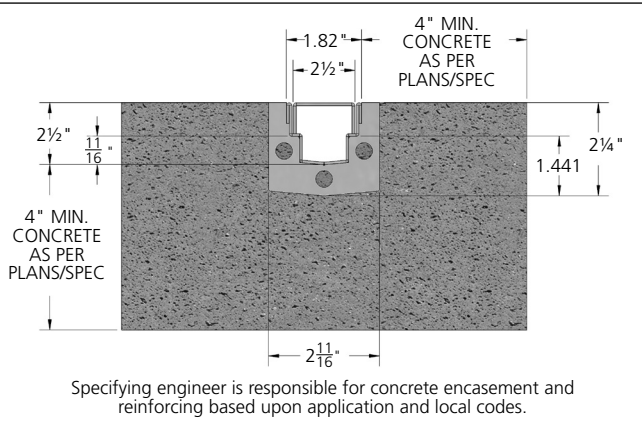

See pages 15 and 16 for the optional grate designs.

MODEL NUMBER	DESCRIPTION
P6012	1 1/2" wide, Type 304 Stainless Steel Trench Drain Body and Grate System (Load Class "A", "Light Duty" ADA compliant grates).
P6012-29	1 1/2" wide, Type 316 Stainless Steel Trench Drain Body and Grate System (Load Class "A", "Light Duty" ADA compliant grates).

SUFFIX	OPTIONAL VARIATIONS	DESCRIPTION
	-C	Membrane Clamp
	-EO	For a 1 1/2" end outlet add Suffix -150-EO to the model #. Eg. P6012-150-EO. For a 2" end outlet add Suffix -EO to the model #. Eg. P6012-EO.
	-FL	Anchor Flange (Instead of Anchor Tabs)
	-LCB	Load Class "B", Medium Duty Grate (2,000 - 4,999 lbs.)
	-LCC	Load Class "C", Heavy Duty Grate (5,000 - 7,499 lbs.)
	-LCD	Load Class "D", Extra Heavy Duty Grate (7,500 - 10,000 lbs.)
	-LCE	Load Class "E", Special Duty Grate (over 10,000 lbs.)
	-LS	Longitudinal Slotted Grate (ADA Compliant)
	-NS	Slip Resistant Grate (Non slip grit finish)

SUFFIX	OPTIONAL VARIATIONS	DESCRIPTION
	P	Push on outlet
	-PG	Perforated Grate (1/4" diameter holes)
	-PHP	Perforated "Heel Proof Grate" (less than 1/4" diameter perforations)
	-SHP	Slotted "Heel Proof" Grate (less than 1/4" wide slots)
	T	Threaded outlet
	X	Inside caulk outlet
	-5	Sediment Bucket
	-6	Vandal Resistant Grate
	-7MG	MI-GARD trap seal protection device (available for 2", 3" and 4" outlet connections)
	-90	90 Degree Section

Note: A 2" No Hub bottom outlet is standard. For a 1 1/2" no hub bottom outlet connection, specify Suffix -150 after the model #. Eg. P6012-150.

Job Name: <input type="text"/>	Page No: <input type="text"/>
Section No: <input type="text"/>	Contract: <input type="text"/>
Schedule No: <input type="text"/>	Purchase Order No: <input type="text"/>