

Location:



**P6120**


**12" Wide, Stainless Steel Body and Grate System**

**SPECIFICATION:**

MIFAB® Series P6120, 12" wide, 16 gauge fabricated Type 304 stainless steel presloped trench drain (1/8" per foot) with slotted, Load Class "A" Light duty stainless steel ADA compliant grates. Free area of 23.00 square inches per 1' section. Square bottom bodies have flanged ends to connect to each other with a neoprene rubber gasket in between. Bottom and end outlets are available in 3", 4" 6" or 8" no hub outlet connections (specify outlet size) and fabricated as part of the trench drain system. Also available with B, C, and D load rated stainless steel grates and optional anchor flange (Suffix -FL).

**FUNCTION:**

Used in laboratory, industrial, commercial, kitchen and other hygienic and/or corrosive areas. Type 304 stainless steel construction provides for ease of cleaning, maintenance and sanitary installation. The inside of the body is manufactured without any overlapping material to ensure that bacteria does not have a place to grow. All grate openings are polished to a smooth finish.

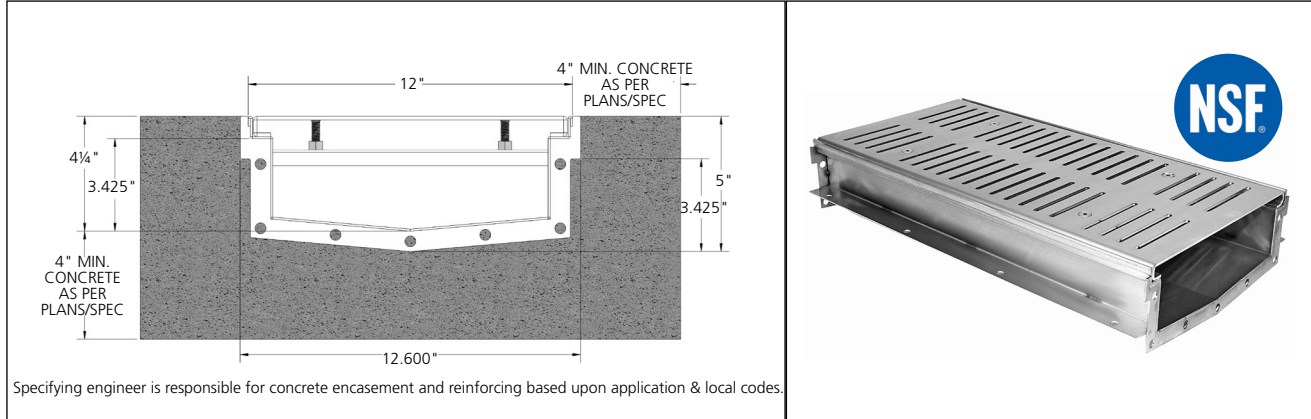

See pages 15 and 16 for the optional grate designs. The P6120-LCB is NSF certified with a load classification of Medium Duty.

MODEL NUMBER	DESCRIPTION
<b>P6120</b>	12" wide, Type 304 Stainless Steel Trench Drain Body and Grate System (Load Class "A", Light Duty" ADA compliant grates)
<b>P6120-29</b>	12" wide, Type 316 Stainless Steel Trench Drain Body and Grate System (Load Class "A", Light Duty" ADA compliant grates)

SUFFIX	OPTIONAL VARIATIONS	DESCRIPTION
	-5	Sediment Bucket
	-C	Membrane Clamp
	-EO	Put 3, 4, 6 or 8 in the last of the four digits of the model # to indicate the end outlet connection size and add suffix -EO. Eg. P6124-EO for a 4" end outlet.
	-FL	Anchor Flange (Instead of Anchor Tabs)
	-LCB	Load Class "B", Medium Duty Grate (2,000 - 4,999 lbs.)
	-LCC	Load Class "C", Heavy Duty Grate (5,000 - 7,499 lbs.)
	-LCD	Load Class "D", Extra Heavy Duty Grate (7,500 - 10,000 lbs.)
	Length	Specify the length that is required
	-LS	Longitudinal Slotted Grate (ADA Compliant)
	-NS	Slip Resistant Grate (Non slip grit finish)
	P	Push on outlet

SUFFIX	OPTIONAL VARIATIONS	DESCRIPTION
	-PG	Perforated Grate (1/4" diameter holes)
	-PHP	Perforated "Heel Proof Grate" (less than 1/4" diameter perforations)
	-RSC	Rounded Inside Bottom Corners
	-SHP	Slotted "Heel Proof" Grate (less than 1/4" wide slots)
	T	Threaded outlet
	X	Inside caulk outlet
	-6	Vandal Resistant Grate
	-7MG	MI-GARD trap seal protection device (available for 2", 3" & 4" outlet connections)
	-90	90 Degree Section

**Note: No hub bottom outlet connections are standard. Specify 3, 4, 6 or 8 in the last of the four digit model number to indicate the bottom no hub outlet size. For the 6" bottom outlet size, please add \$75.00 for Type 304 and \$100.00 for Type 316 stainless steel. For the 8" bottom outlet size, please add \$100.00 for Type 304 and \$130.00 for Type 316 stainless steel. Eg. 4" no hub bottom outlet would be model # P6124.**

Job Name: <input type="text"/>	Page No: <input type="text"/>
Section No: <input type="text"/>	Contract: <input type="text"/>
Schedule No: <input type="text"/>	Purchase Order No: <input type="text"/>