



Whitehall
Manufacturing™

Extremity Whirlpools

Use



← →

E Series 22 Gallon Mobile Whirlpool E-22-M, E-22-MU

(Model E-22-MU shown in photo)



Product photo/image above may show some available options

Whitehall E-22-M Mobile Whirlpools are recommended for treatment of the foot and ankle area, and when provided with a raised undercarriage, may also be used in treatment of the upper extremities.

Tank Capacity is 22 gallons.

E-22-M, Mobile Whirlpool is recommended for the treatment of the foot, ankle and leg to below the knee.

E-22-MU is a Mobile Whirlpool with Undercarriage of heavy duty construction and fixed height which raises the tank for use in treatment of the upper extremities.

Whirlpool Tank is 28"L x 15"W x 18"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. Tank rim is reinforced with a concealed stainless steel rod. Tank bottom is a seamless, rounded covered design to minimize bacteria buildup.

Heavy Duty Swivel Casters support all mobile models. Rear pair of casters are lockable for stabilizing whirlpool during treatment.

Turbine Raising and Lowering Device permits adjustment of desired height and direction of water agitation towards the area of the body to be treated. It is spring balanced and provided with a locking device.

Turbine Assembly functions both as agitator and emptying device. It is equipped with Underwriters Laboratory listed 1/2 HP jet pump motor protected with an ABS plastic shell, and automatic thermal overload

protector, and lifetime-sealed bearings. All parts contacting the water are stainless steel, chrome plated brass or bronze.

Drain options auxiliary drain valve on the bottom of the unit. The **E-45-M-SDP** has a bottom drain, leading to a separate, concealed water evacuation pump. A hose is attached to the side of the unit to facilitate the evacuation. The **E-45-M-DS** is constructed with an integral sump which reduces residual water and eliminates the need for a drain.

Thermometer is provided with a dual scale, adjustable calibration, and a stem inserts into a retainer to prevent rattle during whirlpool agitation.

GUIDE SPECIFICATIONS

Provide Whitehall Mobile Whirlpool (specify model number and options) with a 22-gallon capacity, 28"L x 15"W x 18"D. Whirlpool shall be fabricated from heavy gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. Tank shall have a reinforced rim and shall be fitted with an auxiliary drain valve. Bottom of tank shall be a seamless, rounded covered design to minimize bacteria build up. Whirlpool shall have heavy duty swivel casters with locking device on rear pair of casters. Provide a turbine assembly with raising and lowering device which functions both as agitator and emptying device, permits adjustment of desired height, direction of water agitation, and can be locked into place. Turbine assembly shall be UL listed 1/2 HP jet pump motor with automatic thermal overload protector, and lifetime-sealed bearings. Provide a thermometer with a stem retainer to prevent rattle when whirlpool is in operation.



Member of
U.S. Green
Building Council



Recycleable
Product

Whitehall Mfg. > P.O. Box 3527 > City of Industry, CA 91744 > (800) 782-7706 > (626) 968-6681 > FAX (626) 855-4862

E-22-M

Last Update: 9/15/09



Whitehall Manufacturing™

Extremity Whirlpools

Series

- -E Extremity Series

Capacity

- -22 Gallons

Type

- -DP Mobile Whirlpool with Sump
- -M Mobile Whirlpool
- -MU Mobile Whirlpool with Undercarriage
- -SDP Mobile Whirlpool with Seperate Drain Pump

Suffix Options (See Whirlpool Option Section for Details)

- -ADH Auxiliary Drain Hose Assembly
- -AHC1 Adjustable High Chair with Casters
- -AHC2 Adjustable High Chair with Rubber Tips
- -ALC Adjustable Low Chair

- -ALS Adjustable Low Stool
- -ARS Arm Rest Support

MODEL NUMBER AND OPTION SELECTION

- -EG Enviro Glaze Color Powder Coating - Specify Color: _____
(Special Finish Consult Factory)
- -GFI Ground Fault Interrupter
- -PCS Pump Cover Strainer

Turbine Assembly

Electrical on standard turbine supplied is 115 V 60 Hz
if 220 V is required please specify:


- 50 Hz
- 60 Hz

- -HL Hydro Lift (See Page HYL)
Available for E-22-M

ELECTRIC REQUIREMENTS:
Amps: 8
Volts: 115
Hertz: 60
GFI Receptacle




E-22-M
Standard mobile whirlpool

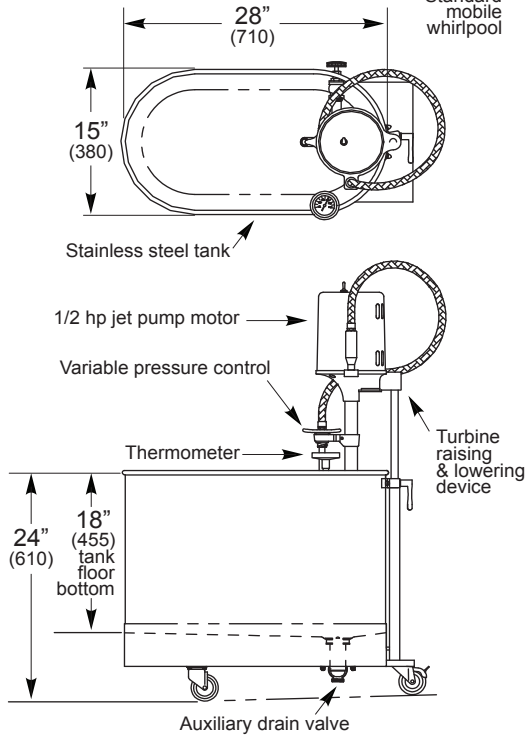


All dimension figures in parentheses are in millimeters.


E-22-M-SDP
Mobile whirlpool with separate drain pump

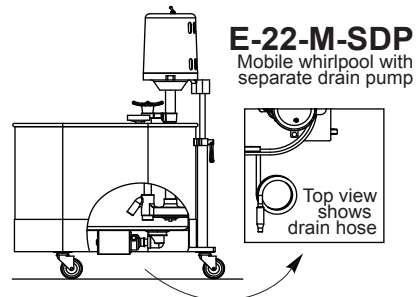

E-22-M-DS
Mobile whirlpool with sump

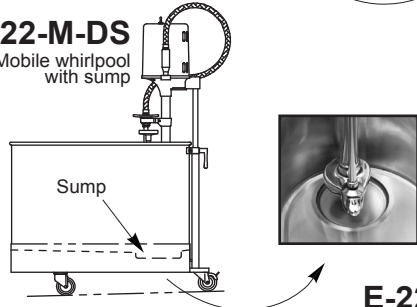

E-22-MU
Mobile whirlpool with undercarriage

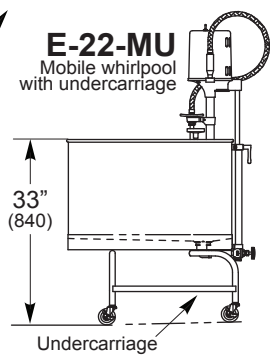

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or suspended data. © 2008 Whitehall Manufacturing, A Division of Acorn Engineering Company. Please visit www.whitehallmfg.com for most current specifications.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____