

Location: _____




FS1790

**24" x 24" x 17" DEEP FLOOR AREA AND
INDIRECT SANITARY WASTE DRAIN WITH FLANGE**

Specification: MIFAB Series FS1790, 24" x 24" x 17" deep floor area and indirect sanitary waste drain complete with white acid resistant coated steel interior and heavy duty fabricated steel loose set grate with white acid resistant coating and anchor flange. Anti-splash aluminum dome strainer included.

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other commercial areas that require a large volume sanitary drain and anchor flange for waterproof membrane installations. Also suitable for indirect waste applications.

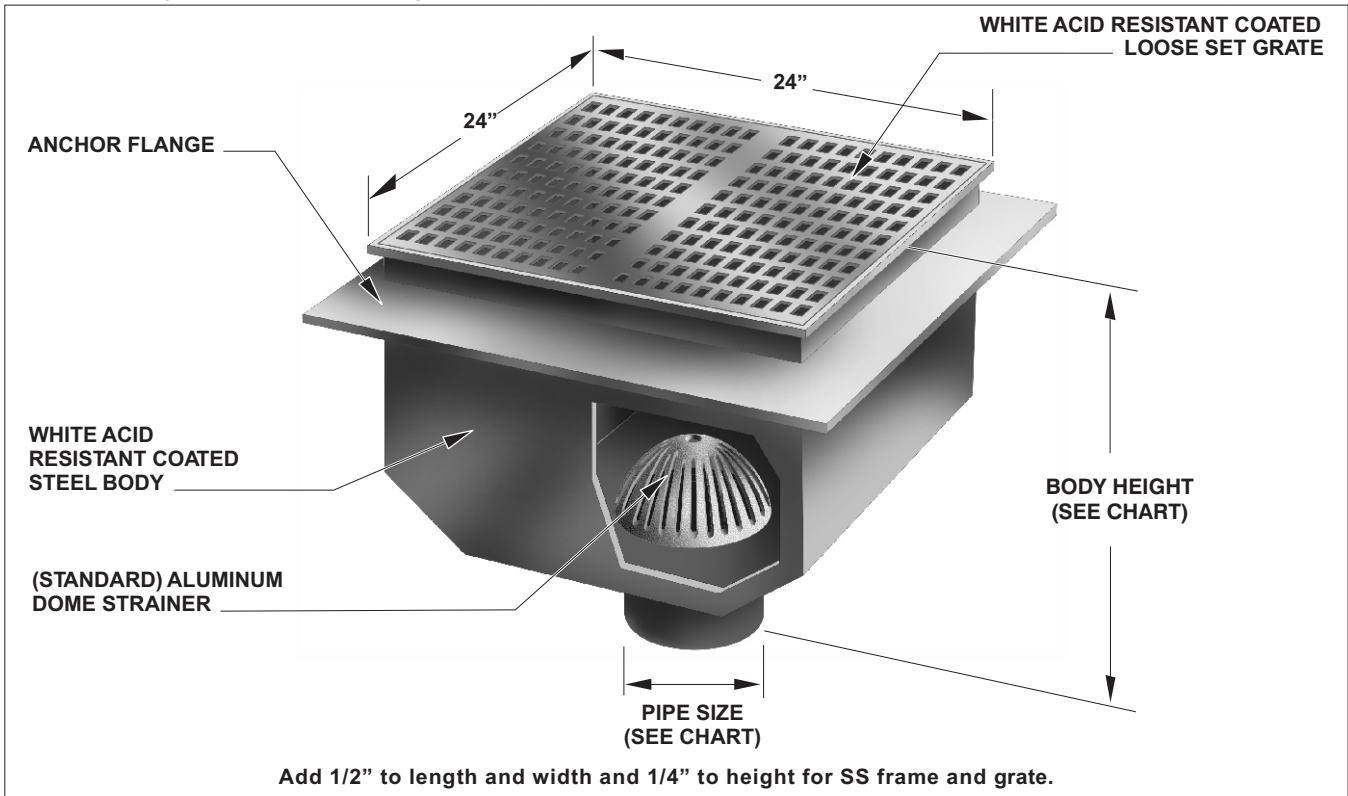

| PIPE SIZE | BODY HEIGHT | | | | |
|-----------|-------------------|---------------|---------------|------------------|---------------------|
| | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
| 2" (51) | 18 1/2" (470) | 19 1/4" (489) | 17 1/2" (445) | 18 1/2" (470) | 18 11/16" (475) |
| 3" (76) | 18 1/2" (470) | 19 1/4" (489) | 17 1/2" (445) | 18 1/2" (470) | 18 3/4" (476) |
| 4" (102) | 18 1/2" (470) | 19 1/4" (489) | 17 1/2" (445) | 18 1/2" (470) | 18 3/4" (476) |
| 5" (127) | 18 1/2" (470) | - | 17 1/2" (445) | 18 1/2" (470) | - |
| 6" (152) | 19" (483) | 22 1/4" (565) | - | - | - |

| SUFFIX | OPTIONAL VARIATIONS: | SUFFIX | SUFFIX |
|--------|--|--------|---|
| -3 | Stainless steel frame and grate | -50 | (Standard) No hub outlet |
| -5 | Sediment bucket | -51 | -C Membrane clamp with hardware |
| -6 | Security screws (-3 only, T-20 Torx and pin) | -69 | -F4 4" round funnel |
| -7 | 1/2" trap seal primer connection (MI-600 Series) | -83 | -F6 6" round funnel |
| -8 | Backwater valve (2", 3", 4") | -90 | -G 4" x 9" oval funnel |
| -9 | Hinged grate (-3 only) | -90NH | -J 3" x 1" oval funnel |
| -21 | Secondary flat stainless steel strainer | -95 | P Push on outlet |
| -22 | Less grate | -150 | -PA Pennsylvania Steel Act compliant product |
| -30 | PVC outlet (2", 3", 4") | -175 | T Threaded outlet |
| -31 | ABS outlet (2", 3", 4") | -BA | X Inside caulk outlet |
| -32 | Deep seal trap with flushing connection | | -Z Extended wide elastomeric flange (with -FL only) |

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____