

Location: _____




R1100-90

ROOF DRAIN WITH SIDE OUTLET

Specification: MIFAB® Series R1100-90 lacquered cast iron roof drain with threaded side outlet, anchor flange, cast iron waterproofing membrane clamp ring with integral gravel stop, and standard self-locking polyethylene dome strainer with a free area of 43 square inches.

Function: Used in any type of flat roofs and gutters. 8" diameter body is ideal for applications with limited space. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

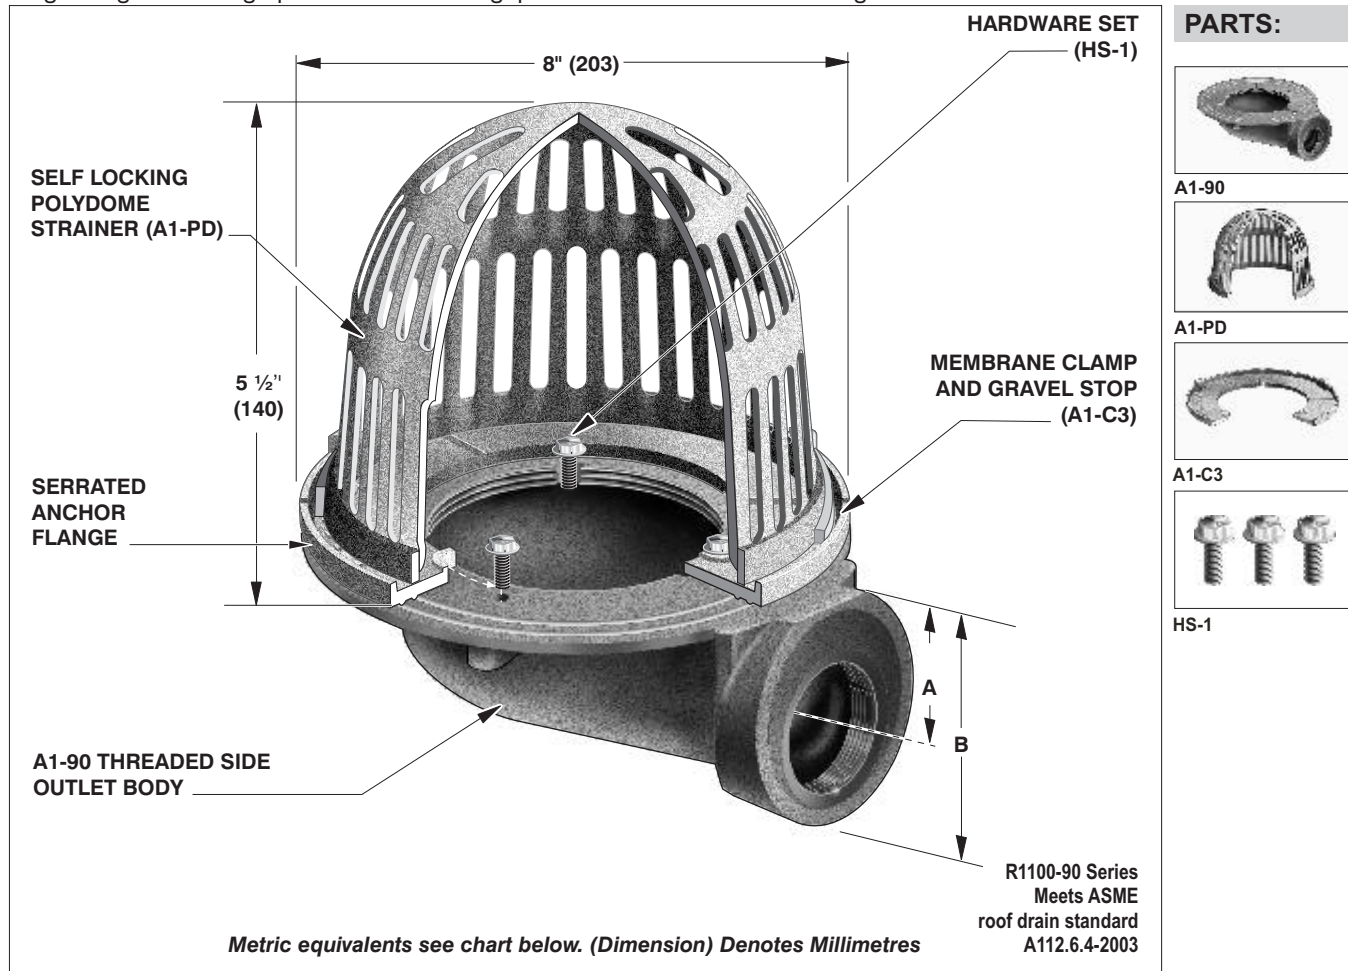

Note: Deck opening - 9" (229) with sump receiver - 10 5/8" (270)

PIPE SIZE	BODY HEIGHT			
	THREADED (STANDARD)		NO HUB (NH)	
	A	B	A	B
2" (51)	2 15/16" (75)	3 7/8" (98)	2 15/16" (75)	3 7/8" (98)
3" (76)	3" (76)	4 3/8" (111)	3" (76)	4 3/8" (111)
4" (102)	3 1/4" (83)	6" (152)	3 1/4" (83)	6" (152)

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	SUFFIX
-6	Vandal proof dome (metal dome only)	-ARRA	S.S. ballast guard with secondary clamp
-11	Acid resistant epoxy coating	-B	Metal dome
-12	Galvanized metal dome	-BA	No hub side outlet
-12A	Galvanized body and membrane clamp	-E	Pennsylvania Steel
-13	Galvanized body, membrane clamp and dome	-EG	Act compliant product
-14	Flat grate (replaces dome strainer)	-F1, -F2, -F3	2" external water dam
-81	Rough bronze dome	-G	Underdeck clamp (A1-C3-CO)
-83	Stainless steel mesh screen over dome		Adjustable water dam
			Water proofing flange
			Extended wide elastomeric flange

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880