

Location: _____




R1200-EU

LARGE SUMP ROOF DRAIN WITH ADJUSTABLE EXTENSION FOR 1 3/4" TO 7" INSULATION

Specification: MIFAB® Series R1200-EU lacquered cast iron deep sump roof drain with 15" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, adjustable cast iron extension flange, underdeck clamp and standard self-locking polyethylene dome strainer with a free area of 125 square inches.

Function: Used in any type of flat roofs. Large free area dome provides for efficient drainage of rain water and prevents debris from entering the drain line. Adjustable extension system can be adjusted to the thickness of insulation on top of the roof deck without the need for gaskets. Body is elevated off of the roof deck eliminating the need for the bearing pan or sump receiver. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

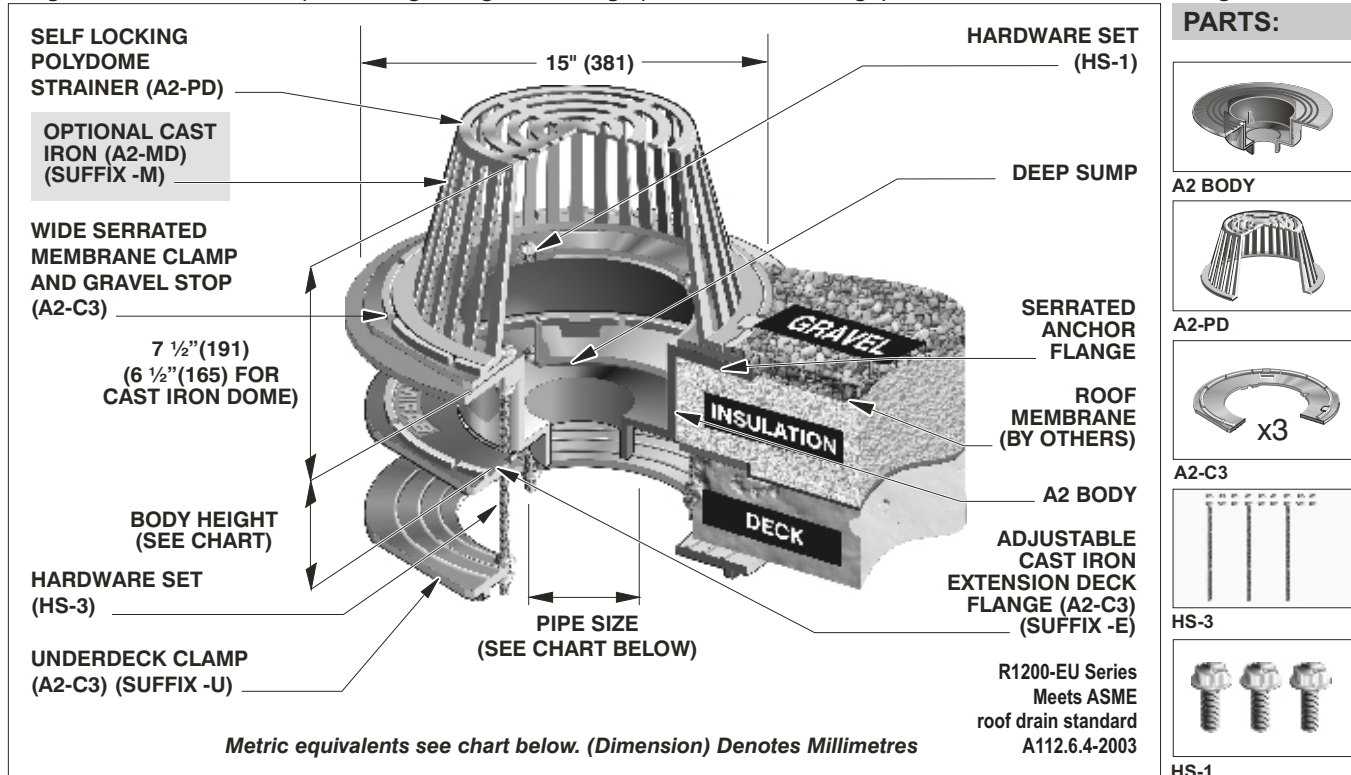

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	6" (152)	—	5 7/16" (138)	6 1/4" (159)	—
6" (152)	7 1/4" (184)	8" (203)	6" (152)	6 1/4" (159)	—
8" (203)	5 7/8" (149)	—	—	5 5/8" (A7-8X body)	—

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	SUFFIX	
-6	Vandal proof dome (metal dome only)	-90NH	No hub side outlet (2",3",4") (cast iron only)	
-11	Acid resistant epoxy coating	(Standard)	No hub outlet	
-12	Galvanized metal dome	-ARRA	ARRA (Stimulus Act) compliant product	
-12A	Galvanized body and membrane clamp	-B	Sump receiver	
-12B	Galvanized metal dome and membrane clamp	-BA	Buy American Act Compliant product	
-13	Galvanized body, membrane clamp and dome	-C	Secondary clamp	
-14	Flate grate (Replaces dome strainer)	-E	Adjustable extension	
-28	Stainless steel body (fabricated) (Type 304)	-EG	Galvanized adjustable extension	
-30	PVC socket connection body	-F1,-F2,-F3	Accuflow (parabolic weir) specify	
-31	ABS socket connection body	-G	Stainless Steel Ballast Guard	
-81	Rough bronze dome	-HC	Adj. ballast guard with secondary clamp	
-83	Stainless steel mesh screen over dome	-JC	S.S. ballast guard with secondary clamp	
-90	Threaded side outlet (2",3",4") (cast iron only)	-M	Cast iron dome	
		-M-80	Low profile aluminum dome	
		P	Push on outlet (2",3",4",6")	
			-PA	Pennsylvania Steel Act compliant product
			T	Threaded outlet
			-U	Underdeck clamp
			-U3	Underdeck clamp with cutaway side
			-V	Fixed extension, 2", 3", 4"
			-VG	Galvanized fixed extension (2",3",4")
			-W	Adjustable water dam (4" dia.)
			-W-1	Water proofing flange
			-W2	2" high internal water dam
			-W3	3" high internal water dam
			-W4	4" high internal water dam
			-W6	6" diameter adjustable water dam
			X	Inside caulk outlet (2",3",4",6")
			-XJ	Vertical expansion joint (see R1900)
			-Z	Extended wide elastomeric flange

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.