

Location: \_\_\_\_\_




# R1200-G

## LARGE SUMP I.R.M.A. ROOF DRAIN WITH STAINLESS STEEL BALLAST GUARD

**Specification:** MIFAB® Series R1200-G lacquered cast iron deep sump roof drain with 15" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, 6" (152) high stainless steel perforated ballast guard with ½" (13) round drainage openings and standard self-locking polyethylene dome strainer with a free area of 125 square inches.

**Function:** For roofs that use the insulated membrane assembly method of waterproofing (I.R.M.A.). Typical when built-up felt and asphalt waterproofing is installed on top of the roof membrane for protection against the elements. The 6" high perforated stainless steel ballast guard is furnished to retain the crushed gravel used in flat roof construction. The ½" diameter holes allow for drainage without clogging. Large free area dome provides for efficient drainage of rain water and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

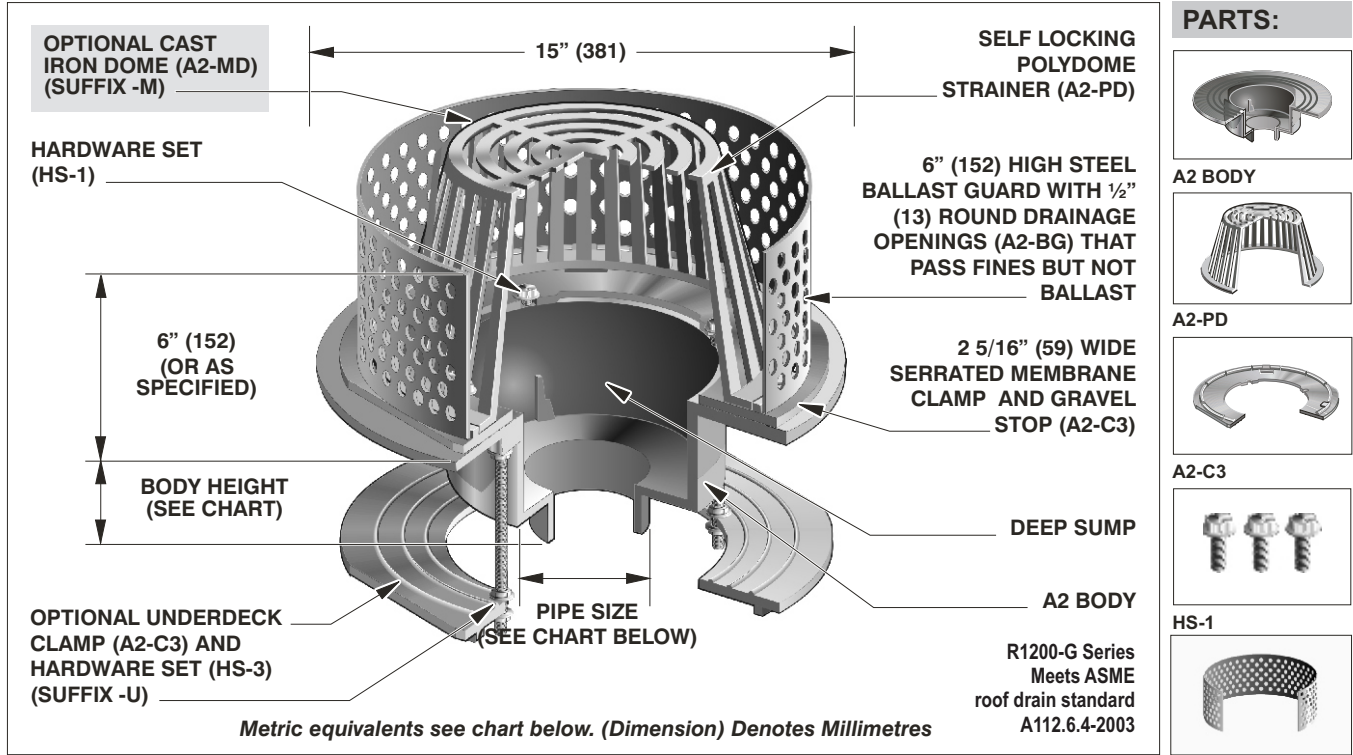

**Note:** Deck opening - 10" (254) with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	6" (152)	—	5 7/16" (138)	6 1/4" (159)	—
6" (152)	7 1/4" (184)	8" (203)	6" (152)	6 1/4" (159)	—
8" (203)	5 7/8" (149)	—	—	5 5/8" (A7-8X body)	—

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	SUFFIX
-6	Vandal proof dome (metal dome only)	-83	Stainless steel mesh screen over dome
-11	Acid resistant epoxy coating	-90	Threaded side outlet (cast iron only, 2",3",4")
-12	Galvanized metal dome	-90NH	No Hub side outlet (cast iron only) (2",3",4")
-12A	Galvanized body and membrane clamp	(Standard)	No hub outlet
-12B	Galvanized metal dome and membrane clamp	-ARRA	ARRA (Stimulus Act) compliant product
-13	Galvanized body, membrane clamp and dome	-B	Sump receiver
-14	Flat grate (replaces dome strainer)	-BA	Buy American Act
-28	Stainless steel body (fabricated)(Type 304)	-E	Compliant product
-30	PVC socket connection body	-EG	Adjustable extension
-31	ABS socket connection body	-M	Galvanized adjustable extension
-81	Rough bronze dome		Cast iron dome
		-M-80	Low profile aluminum dome
		P	Push on outlet (2",3",4",6")
		-PA	Pennsylvania Steel Act compliant product
		T	Threaded outlet (2",3",4",6")
		-U	Underdeck clamp
		-U3	Underdeck clamp with cutaway side
		-V	Fixed extension, (2", 3", 4")
		-VG	Galvanized fixed extension (2",3",4")
		-W-1	Water proofing flange
		X	Inside caulk outlet (2",3",4",6")
		-XJ	Vertical expansion joint (See R1900)
		-Z	Extended wide elastomeric flange

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_