

Location: _____




R1200-R-SR

LARGE SUMP SIPHONIC ROOF DRAIN WITH EXTERNAL 2" HIGH WATER DAM

Specification: MIFAB® Series R1200-R-SR lacquered cast iron deep sump siphonic roof drain with secured siphonic air baffle, 15" diameter large cast iron combined 2" high external water dam and membrane clamp with integral gravel stop, and a standard self-locking polyethylene dome strainer with a free area of 125 square inches.

Function: For use in engineered siphonic roof drainage systems. Used in any type of flat roof. Large free area dome provides for efficient drainage of rain water and prevents debris from entering the drain line. Extra wide combined 2" high external water dam overflow receiver and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials. Siphonic air baffle greatly enhances drain capacity compared to conventional roof drains.

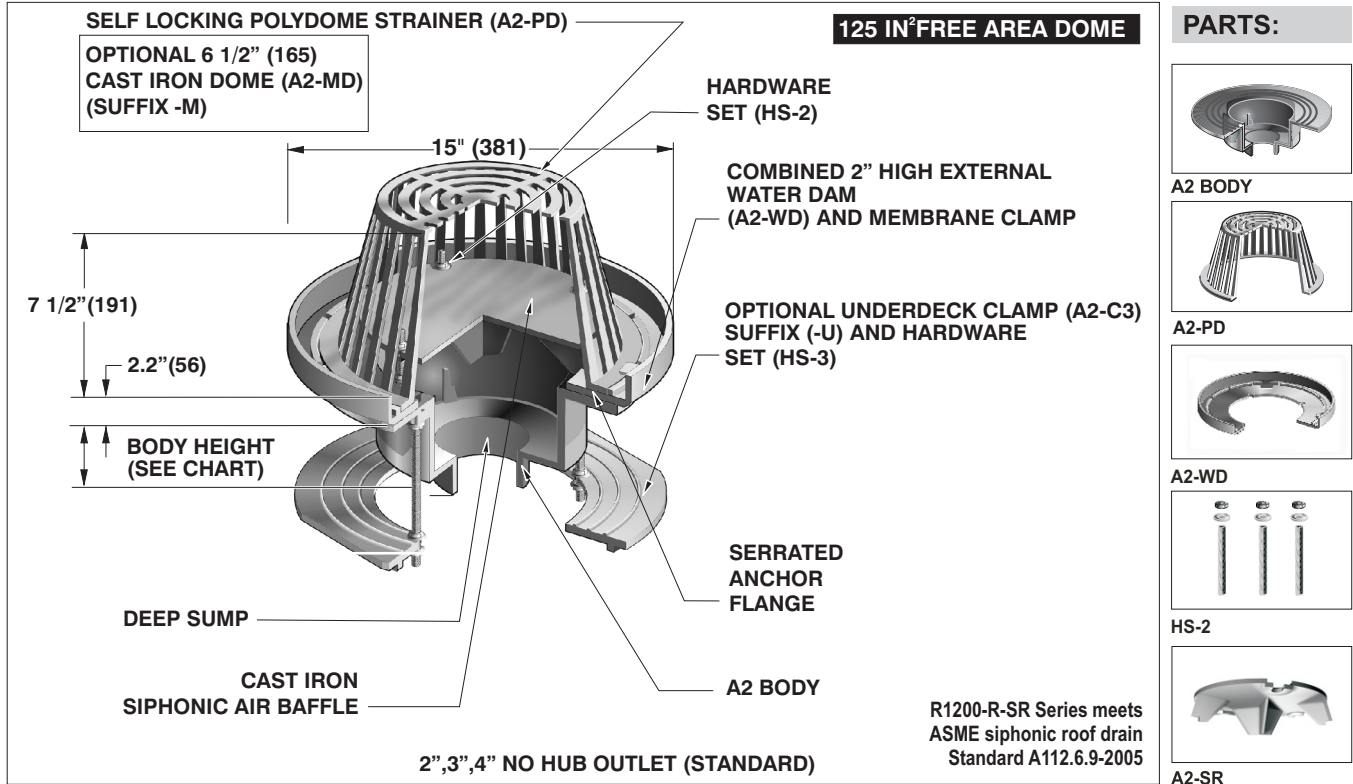

Note: Deck opening - 10" (254), with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX		SUFFIX	
-6	Vandal proof dome (metal dome only)	(Standard)	No Hub outlet	P	Push on outlet
-11	Acid resistant epoxy coating	-ARRA	ARRA (Stimulus Act) compliant product	-PA	Pennsylvania Steel Act compliant product
-12	Galvanized metal dome	-B	Sump receiver	T	Threaded outlet
-12A	Galvanized body and membrane clamp	-BA	Buy American Act Compliant product	-U	Underdeck clamp
-12B	Galvanized metal dome and membrane clamp	-C	Secondary clamp	-U3	Underdeck clamp with cutaway side
-13	Galvanized body, membrane clamp, baffle and dome	-E	Adjustable extension	-V	Fixed static extension, 2", 3", 4"
-28	Stainless steel body (fabricated) (Type 304) (2", 3", 4")	-EG	Galvanized Adjustable extension	-VG	Galvanized fixed extension (2", 3", 4")
-30	PVC socket connection body	-G	Stainless steel ballast guard	-W-1	Water proofing flange
-31	ABS socket connection body	-HC	Adj. ballast guard with secondary clamp	X	Inside caulk outlet
-81	Rough bronze dome	-JC	S.S. ballast guard with secondary clamp	-XJ	Vertical expansion joint (see R1900)
-83	Stainless steel mesh screen over dome	-M	Cast iron dome	-Z	Extended wide elastomeric flange
		-M-80	Low profile aluminum dome		

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.