

Location: _____





R1200-RS

LARGE SUMP ROOF DECK CONDENSATE RECEPTOR DRAIN

Specification: MIFAB® Series R1200-RS lacquered cast iron deep sump roof drain with 15" diameter anchor flange, 2" high cast iron external combined water dam and waterproofing membrane clamp ring, and internal dome strainer.

Function: Used in flat roofs to receive condensate and wastewater from air conditioners, cooling towers and other mechanical equipment. The 2" high external dam prevents storm water from entering the drain line and the internal dome strainer prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

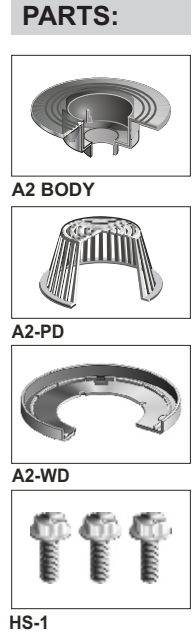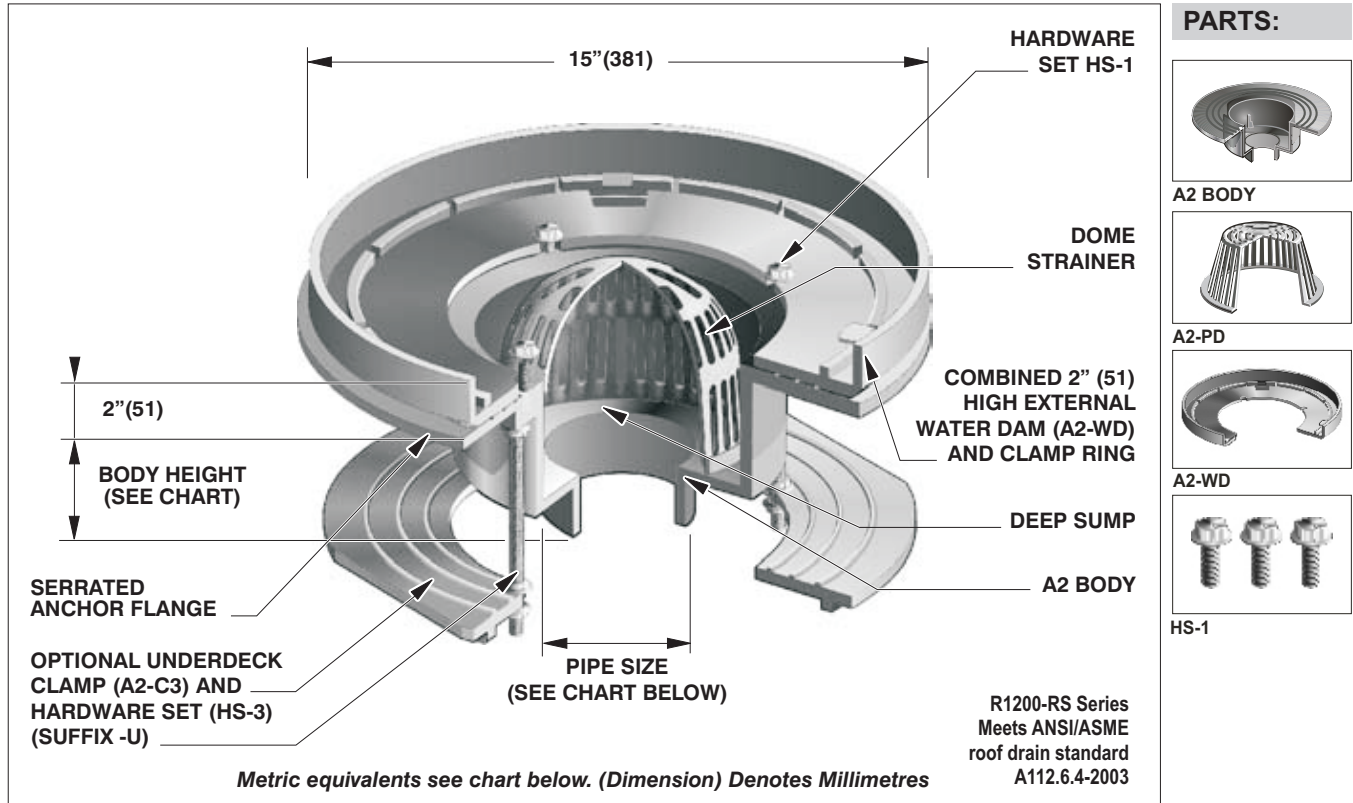

R1200-RS Series
Meets ANSI/ASME
roof drain standard
A112.6.4-2003

Note: Deck opening - 10" (254) with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	5 7/16" (138)	-	5 7/16" (138)	6 1/4" (159)	-
6" (152)	5 7/8" (149)	8" (203)	6" (152)	6 1/4" (159)	-
8" (203)	5 7/8" (149)	-	-	5 5/8" (143)	-

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX		SUFFIX	
-11	Acid resistant epoxy coating	(Standard)	No hub outlet	-PA	Pennsylvania Steel Act
-12	Galvanized water dam	-ARRA	ARRA (Stimulus Act)		complaint product
-13	Galvanized body and water dam	-B	compliant product	T	Threaded outlet (2",3",4",6")
-28	Stainless steel body (fabricated) (Type 304)	-BA	Sump receiver	-U	Underdeck clamp
-30	PVC socket connection body	-C	Buy American Act	-U3	Underdeck clamp with cutaway side
-31	ABS socket connection body	-E	compliant product	-V	Fixed extension, 2",3",4"
-81	Rough bronze dome	-EG	Secondary clamp	-VG	Galvanized fixed extension (2",3",4")
-83	Stainless steel mesh screen over dome	-HC	Adjustable extension	-W-1	Water proofing flange
-90	Threaded side outlet (2",3",4")	-JC	Galvanized adjustable extension	X	Inside caulk outlet (2",3",4",6")
-90NH	No Hub side outlet (cast iron only) (2",3",4")	-P	Adj. ballast guard with secondary clamp	-XJ	Vertical expansion joint (see R1900)
			S.S. ballast guard with secondary clamp	-Z	Extended wide elastomeric flange
			Push on outlet (2",3",4",6")		

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____