

Location: _____




MIFAB®

R1200-W


**LARGE SUMP ROOF DRAIN WITH
ADJUSTABLE INTERNAL STANDPIPE DAM**

Specification: MIFAB® Series R1200-W lacquered cast iron deep sump roof drain with 15" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, adjustable internal standpipe dam and standard self-locking polyethylene dome strainer with a free area of 125 square inches.

Function: Used in flat roofs where a constant height of water is required. Also used as a safety overflow on conventional roofs, draining water when the depth of water on the roof exceeds the standpipe height. Standpipe dam can be cut to required water depth. Large free area dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

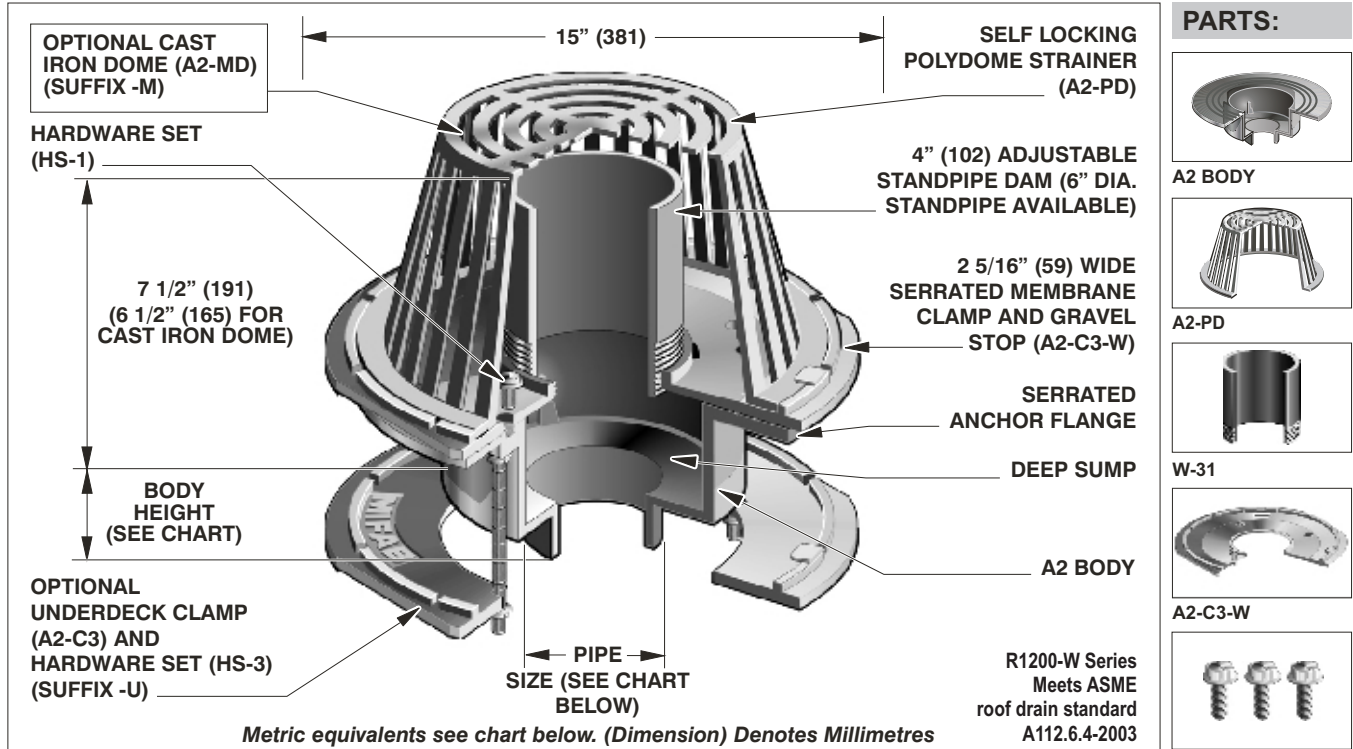

PARTS:

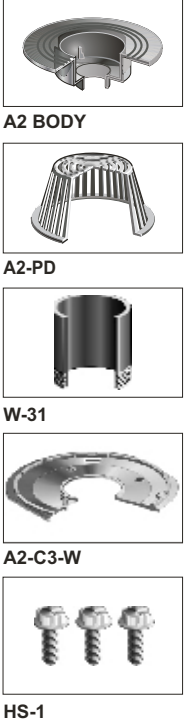

Note: Deck opening - 10" (254) with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	6" (152)	—	5 7/16" (138)	6 1/4" (159)	—
6" (152)	7 1/4" (184)	8" (203)	6" (152)	6 1/4" (159)	—
8" (203)	5 7/8" (149)	—	—	5 5/8" (A7-8X body)	—

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX		SUFFIX	
-6	Vandal proof dome (metal dome only)	-90NH	No Hub side outlet (cast iron only)(2",3",4")	-PA	Pennsylvania Steel Act compliant product
-11	Acid resistant epoxy coating	(Standard)	No hub outlet	T	Threaded outlet (2",3",4",6")
-12	Galvanized metal dome	-ARRA	ARRA (Stimulus Act) compliant product	-U	Underdeck clamp
-12A	Galvanized body and membrane clamp	-B	Sump receiver	-U3	Underdeck clamp with cutaway side
-12B	Galvanized metal dome and membrane clamp	-BA	Buy American Act Compliant product	-V	Fixed extension (2", 3", 4")
-13	Galvanized body, membrane clamp and dome	-C	Secondary clamp	-VG	Galvanized fixed extension (2",3",4")
-28	Stainless steel body (fabricated) (Type 304)	-E	Adjustable extension	-W-1	Water proofing flange
-30	PVC socket connection body	-EG	Galvanized adjustable extension	-W2	2" high internal water dam
-31	ABS socket connection body	-G	Stainless steel ballast guard	-W3	3" high internal water dam
-81	Rough bronze dome	-HC	Adj. Ballast guard with secondary clamp	-W4	4" high internal water dam
-83	Stainless steel mesh screen over dome	-JC	S.S. Ballast guard with secondary clamp	-W6	6" diameter standpipe
-90	Threaded side (Cast iron only) outlet (2",3",4")	-M	Cast iron dome	X	Inside caulk outlet (2",3",4",6")
		-M-80	Low profile aluminum dome	-XJ	Vertical expansion joint (see R1900)
		P	Push on outlet (2",3",4",6")	-Z	Extended wide elastomeric flange

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____