

Location: _____




R1270

COMBINED LARGE SUMP ROOF DRAIN WITH SECONDARY OVERFLOW

Specification: MIFAB® Series R1270 combined large sump roof drain and secondary overflow system; consisting of 24" x 42" galvanized sump receiver, two lacquered cast iron roof drain bodies with 15" diameter anchor flange, cast iron waterproofing membrane clamp rings with integral gravel stop, one 4" ABS overflow standpipe and two self-locking polyethylene dome strainers with a combined free area of 250 square inches.

Function: Used in any type of conventional or flat roofs where a safety overflow, which receives water only when the accumulation is greater than the height of the standpipe, is required to be located beside a standard roof drain. The standpipe can be adjusted to attain the desired overflow water depth. Large free area domes provide for efficient drainage of rain water and prevents debris from entering the drain line. The underdeck clamp ring is eliminated with this product because the roof drain bodies are bolted to the underside of the sump receiver and is therefore fixed. Three pieces of 5/16" x 3/4" hardware bolts and washers are provided to secure MIFAB's A2 bodies to the underside of the R1270-BP.

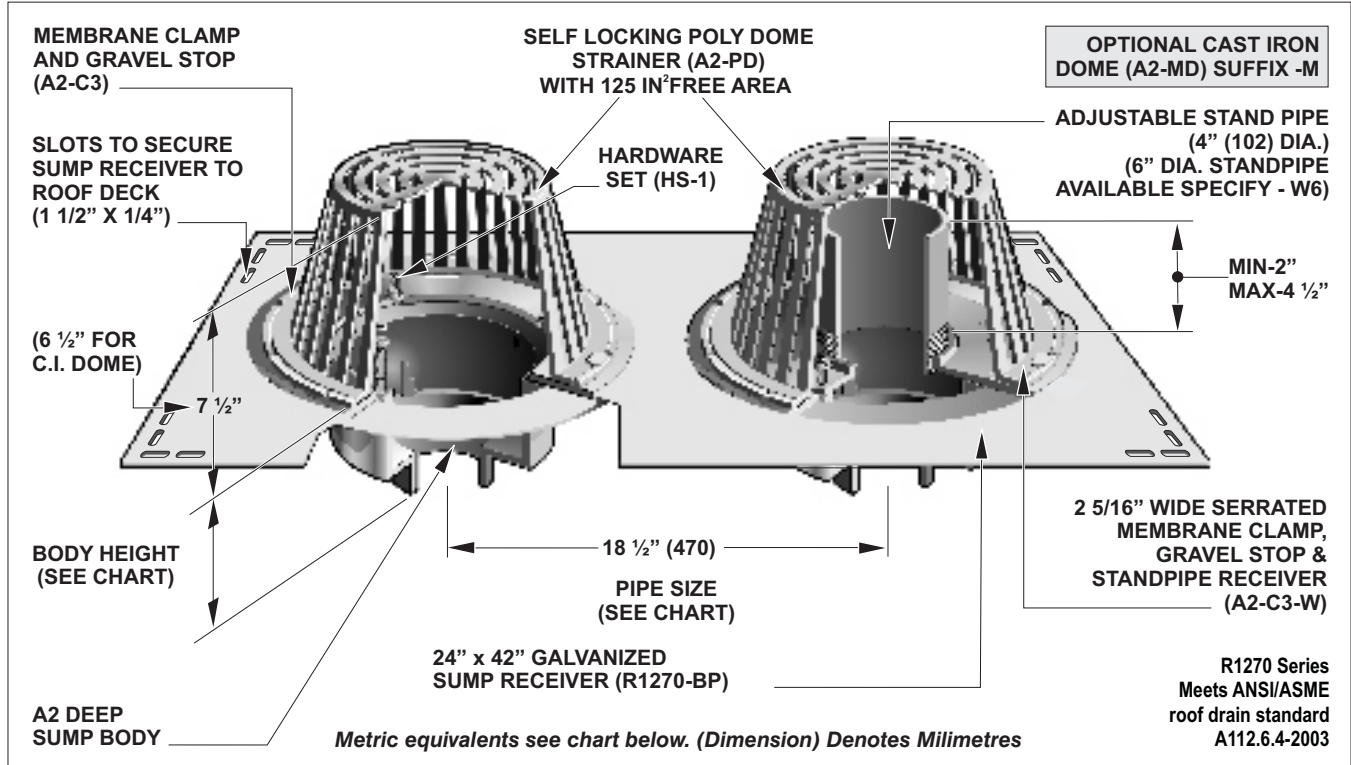

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	6" (152)	-	5 7/16" (138)	6 1/4" (159)	-
6" (152)	7 1/4" (184)	8" (203)	6" (152)	6 1/4" (159)	-
8" (203)	6" (152)	-	-	6" (152)	-

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	SUFFIX
-6	Vandal proof domes (metal domes only)	-81	Rough bronze domes
-11	Acid resistant epoxy coating	-90NH	No hub side outlets
-12	Galvanized metal domes	(Standard)	No hub outlets
-12A	Galvanized bodies and membrane clamps	-ARRA	ARRA (Stimulus Act) compliant product
-12B	Galvanized metal domes and membrane clamps	-BA	Buy American Act compliant product
-13	Galvanized bodies, membrane clamps and domes	-C	Secondary clamps
-28	Stainless steel bodies (Type 304)	-E	Adjustable extension
-30	PVC socket connection bodies	-EG	Galvanized adjustable extension
-31	ABS socket connection bodies	-G	Stainless steel ballast guards
-90	Threaded side outlets	-JC	S.S. Ballast guard with secondary clamps
		-M	Cast iron domes
		-M-80	Low profile aluminum domes
		P	Push on outlets (2",3",4",6")
		-PA	Pennsylvania Steel Act compliant product
		T	Threaded outlets (2",3",4",6")
		-U	Underdeck clamps (A2-C3)
		-U3	Underdeck clamps with cutaway side
		-W-1	Water proofing flange
		X	Inside caulk outlets (2",3",4",6",8")
		-XJ	Vertical expansion joints (see R1900)

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.